

October.01.
2015

Abrites Diagnostics for Hyundai/KIA
User Manual



Abrites Diagnostics for Hyundai/KIA
User Manual

abrites.com

List of Revisions

Date	Chapter	Description	Revision
27. September. 2015	ALL	First version of the document.	1.0

1. Introduction.....	3
2. Using the Abrites diagnostics for Hyundai/ KIA.....	3
3. Special functions.....	6
3.1 Key programming.....	6
3.2 Remote programming.....	8
3.3 Dump tool.....	10
3.4 ECU Flasher.....	11
3.5 Cluster calibration.....	13
3.6 Read/ Update Conf Data.....	15

1. Introduction

“Abrites Diagnostics for Hyundai/ KIA” is a Windows PC based diagnostic software for Hyundai and KIA vehicles. With the help of this software you can perform complete diagnostic operations on all vehicles of the brands.


For proper operation of your diagnostic software you will need a corresponding interface for connection between your PC and vehicle named “AVDI”.

AVDI is an interface produced by Abrites Ltd. intended to act as an interface between the PC and the electronic control units. AVDI should be used with ABRITES software produced by Abrites Ltd.
ABRITES is a trade mark of Abrites Ltd.

2. Using the Abrites diagnostics for Hyundai/ KIA

The Abrites diagnostics for Hyundai/ KIA is installed together with the rest of the Abrites diagnostic software applications as a part of the Abrites diagnostic suite provided to the user via e-mail. The user can start the software by clicking on the appropriate icon from the Abrites “Quick start” menu.


Once the software is selected the user will see the following screen:

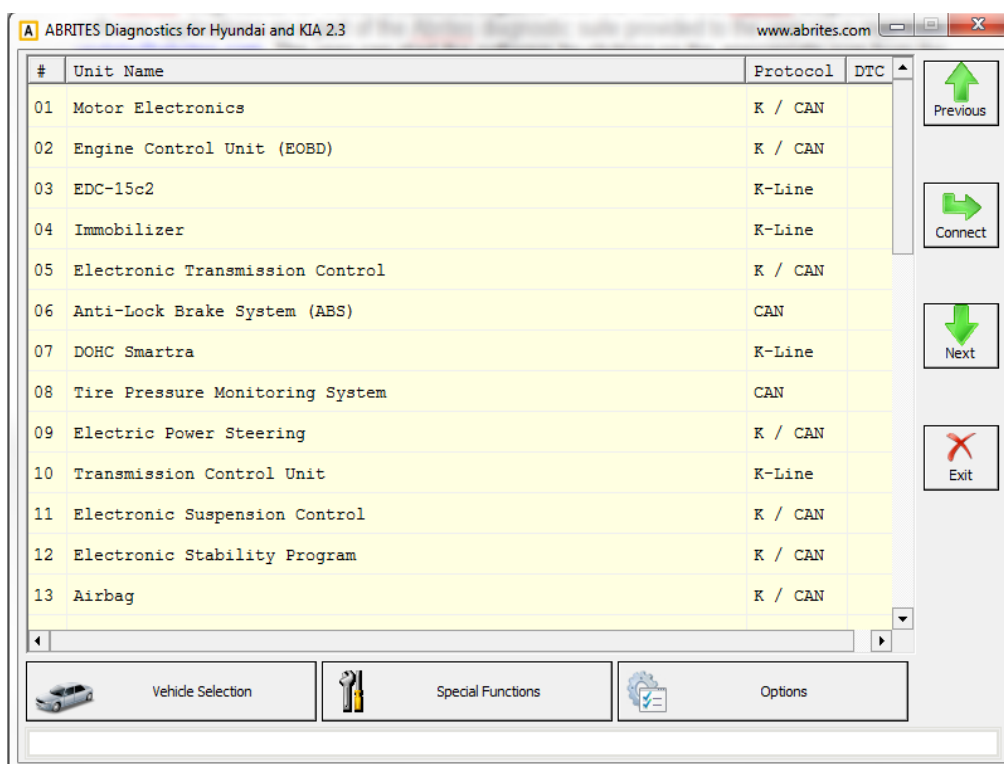

This is the main diagnostic screen of the software. It contains the navigation buttons and provides a list of all the electronic modules that may be integrated into Hyundai and Kia vehicles.

2.1 Diagnostics


In order to perform basic diagnostic operations such as module identification, reading and clearing of diagnostic trouble codes (DTC) and live data measurement the vehicle model should be selected.

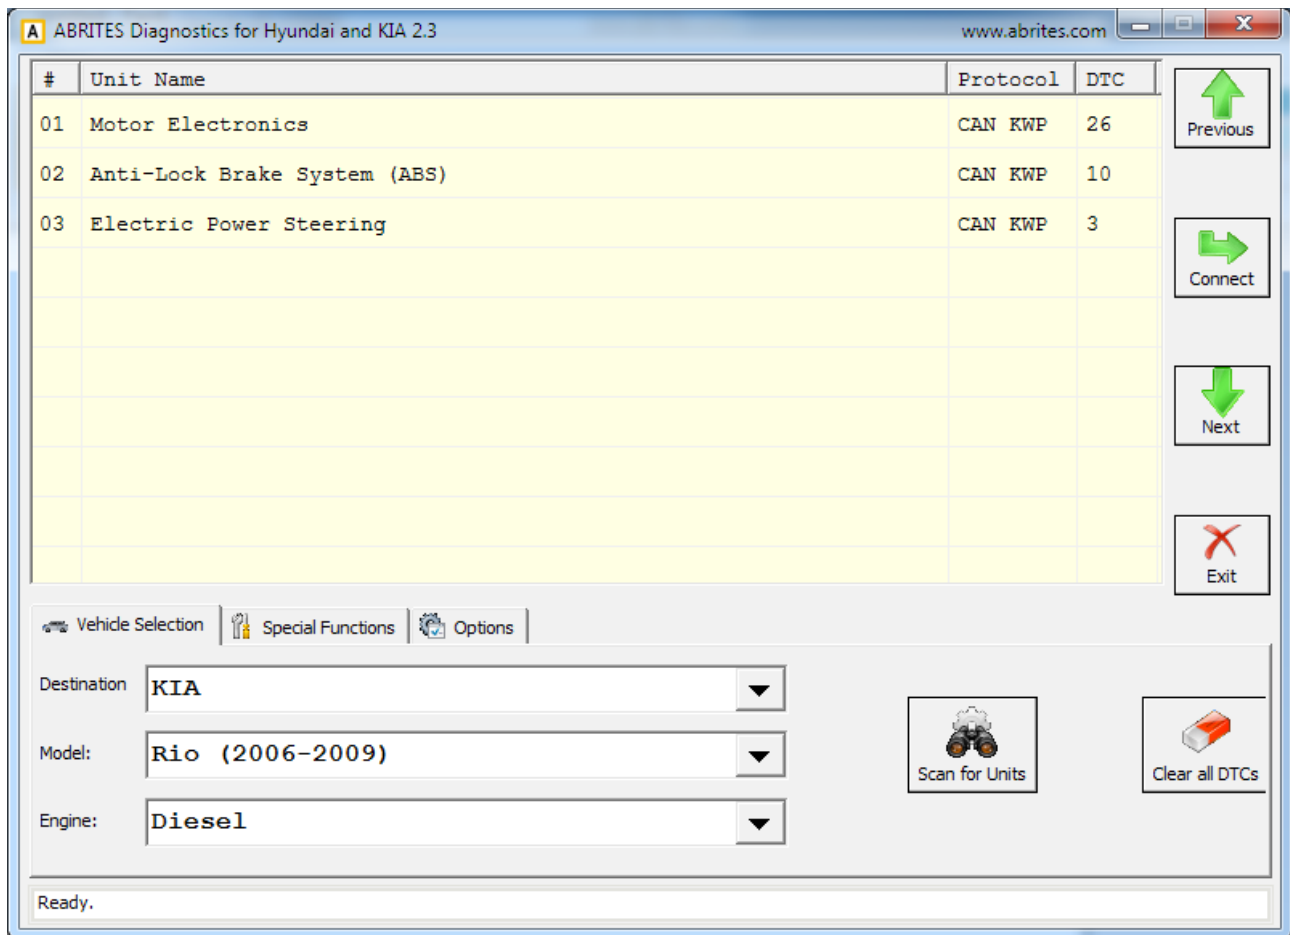

Once the vehicle is selected the Abrites diagnostics for Hyundai and Kia will display all the possible modules that may be integrated into this specific vehicle. It will display all the protocols in which these electronic components communicate.

In order to begin diagnostics the Scan for units button needs to be selected. Then the software will begin testing all the electronic modules. It will display them and the DTCs they contain.

Once the diagnostics is complete the user can choose to enter each specific electronic module within the tested vehicle.

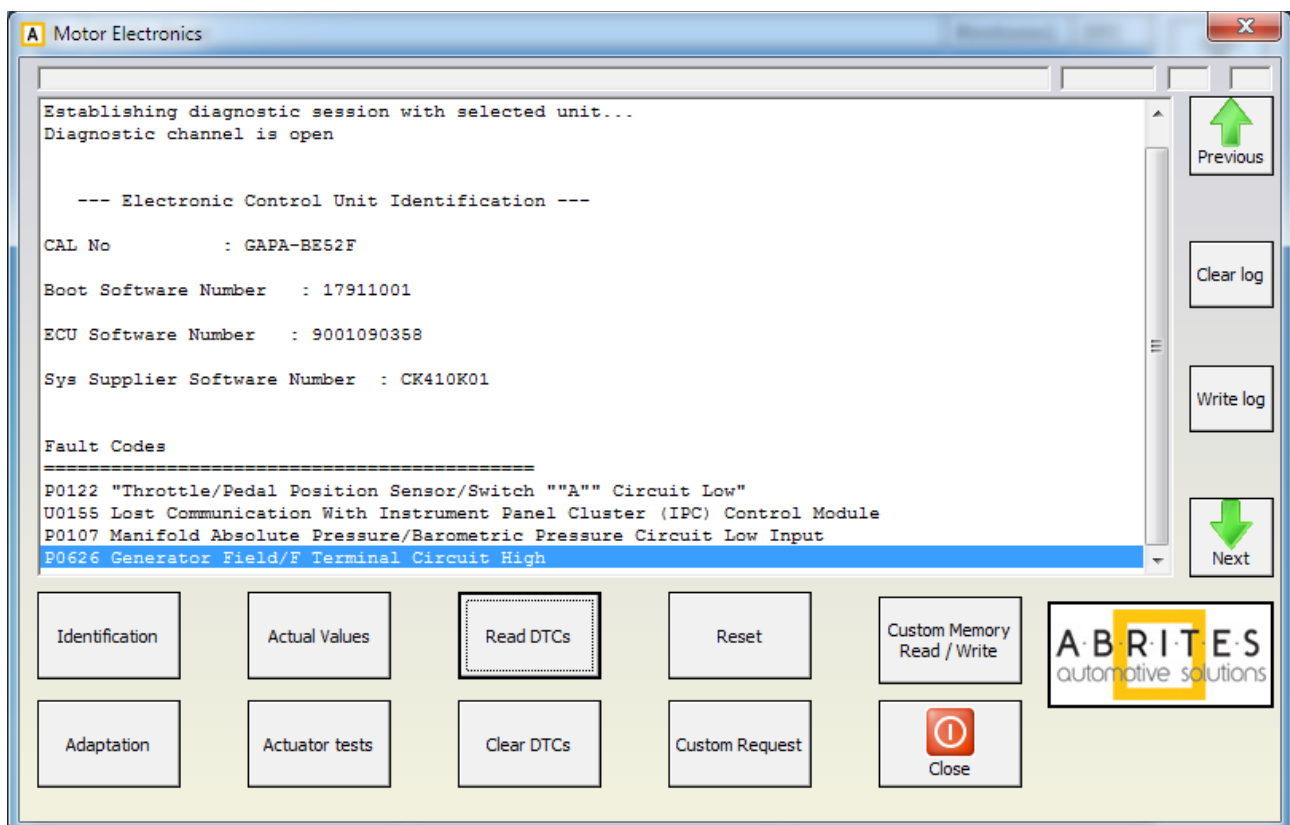


- The Identification button will provide full module identification i.e. make, model, date of manufacturing, etc.
- The Actual values button will show the actual values of the current vehicle in real time.
- “Read DTCs” will show the current diagnostic trouble codes for the selected electronic module.
- The Adaptation button will show the options for unit adaptation.

- "Actuator tests" will allow the user to test various actuators within the selected electronic unit.
- Clear DTCs will clear the diagnostic codes present in the module.
- "Custom request" allows advanced users to send binary signals to the modules.
- "Custom Memory Read/ Write" lets the user update the configuration of the unit.
- "Reset" will reset the module.

3. Special functions

The Special functions included in the Abrites diagnostics for Hyundai and Kia are designed to assist the user to perform specific operations also known as advanced diagnostics.

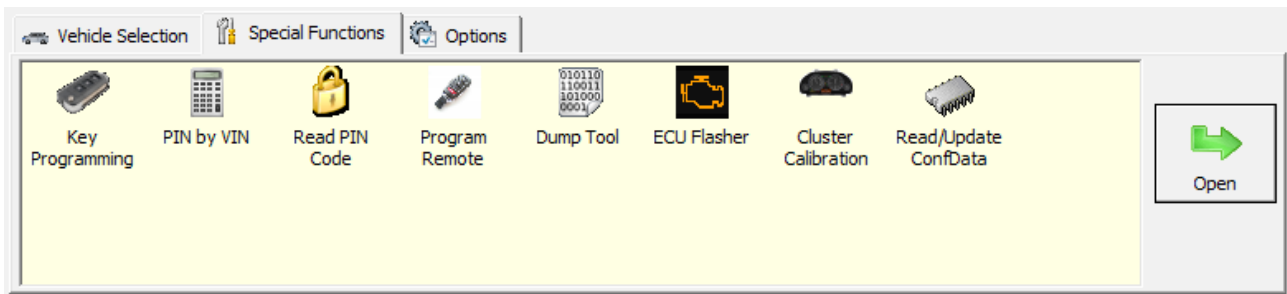


3.1 Key programming

This special function allows the user to perform key programming for the vehicles from the Hyundai and KIA brands. It is used in combination with the PIN by VIN function (which allows the PIN code for key learning to be calculated using the VIN number of the vehicle) or using the Read PIN code function (which extracts the PIN code from the vehicle).


- PIN code extraction by VIN.

Input the last 6 digits of the VIN number of the vehicle and press "CALCULATE".

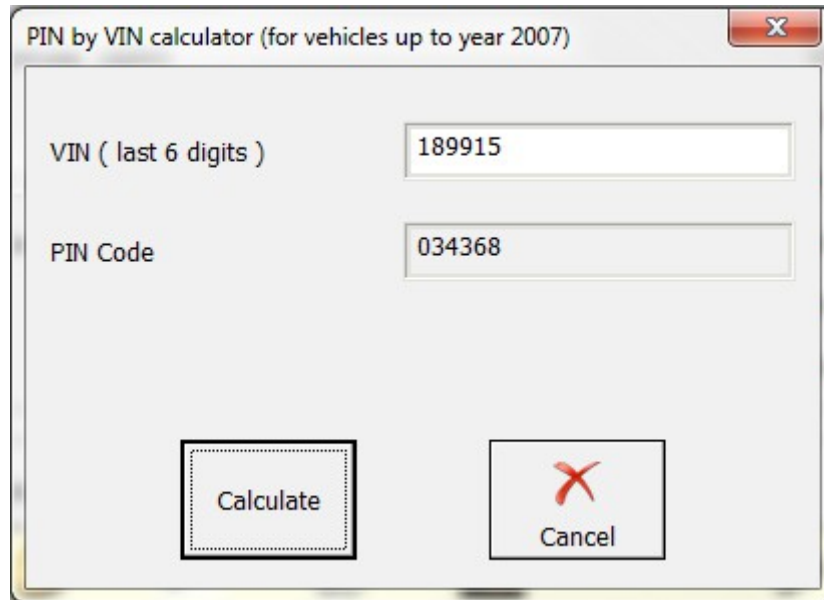

- PIN code extraction from the vehicle.

When this function is selected the user should ensure that the message is read and that its content corresponds to the tested vehicle.

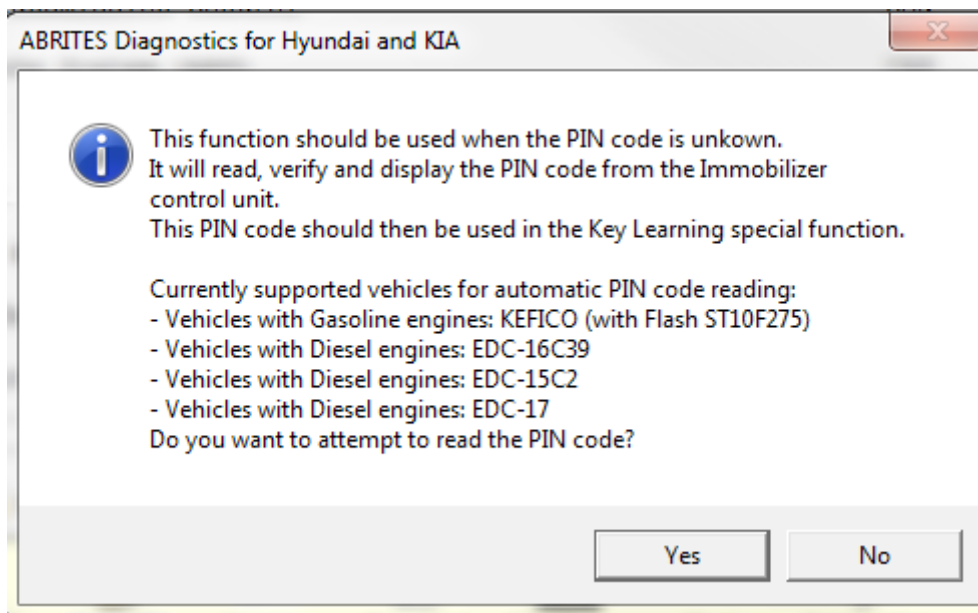


After that is done the software will calculate the PIN code and provide it to the user.

- Key learning.

Once the PIN code of the vehicle has been retrieved the user can proceed to perform key learning.

When the key programming option is opened the user should see the following screen:

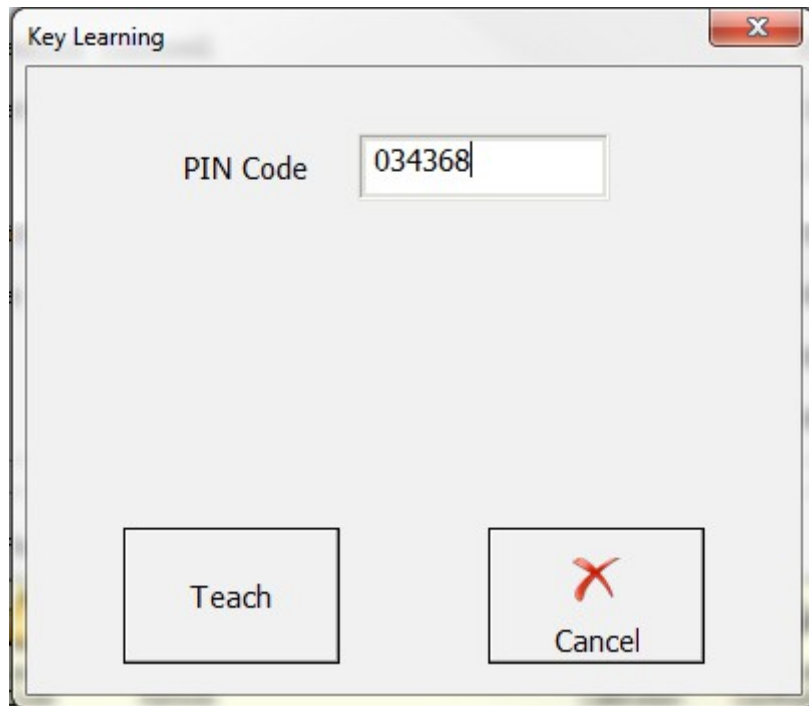


At this point the user should place the key in the ignition and press "Teach". Once that is done the user should follow the onscreen instructions closely and read each message that comes up carefully.

3.2 Remote programming


In some cases the remote control cannot be programmed with the key. It is then when the remote programming function is most helpful.

When the function is selected the user you will see the following screen. Once it comes up the user should follow the onscreen instructions closely:

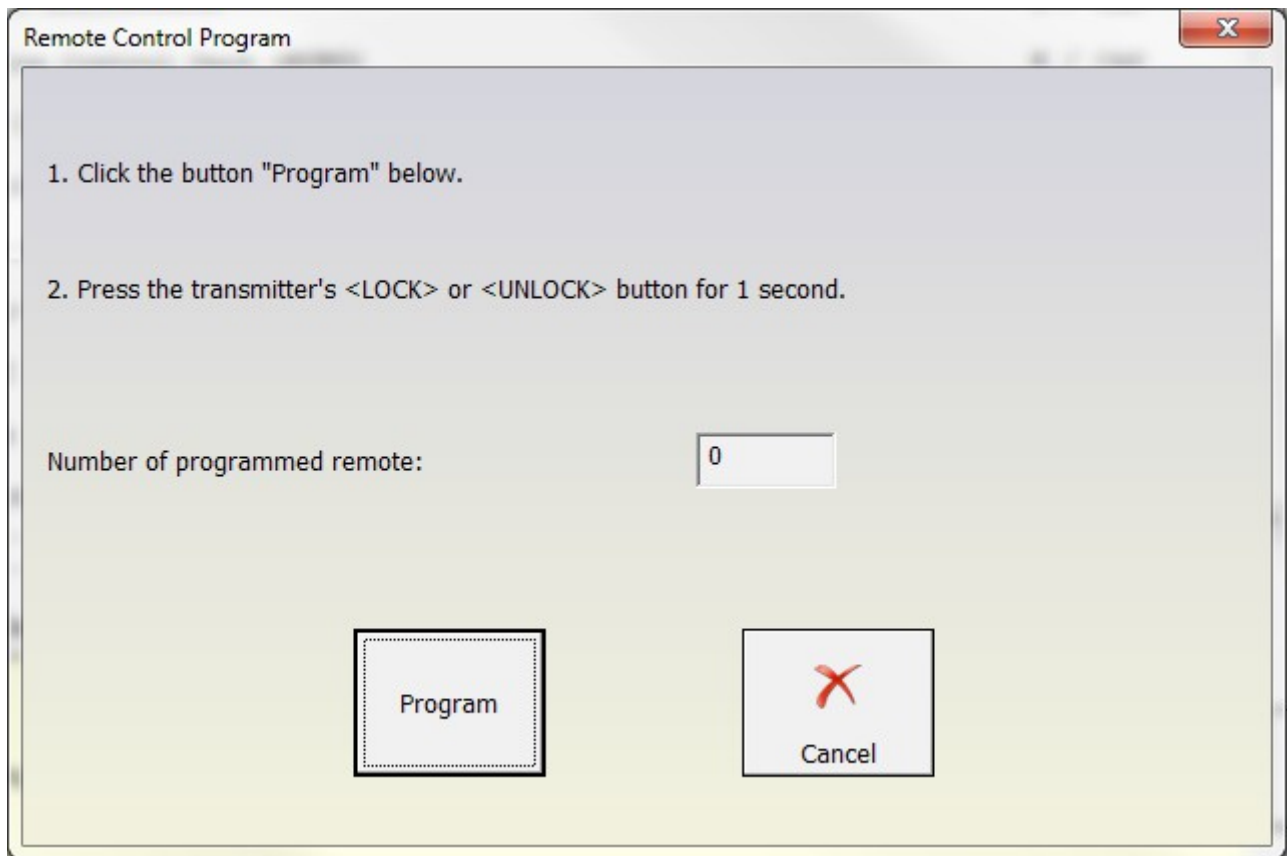


3.3 Dump tool

The Dump tool special function allows the user to read, save and modify Configuration data, read pin codes and others using a programmer to read the dumps from different units.

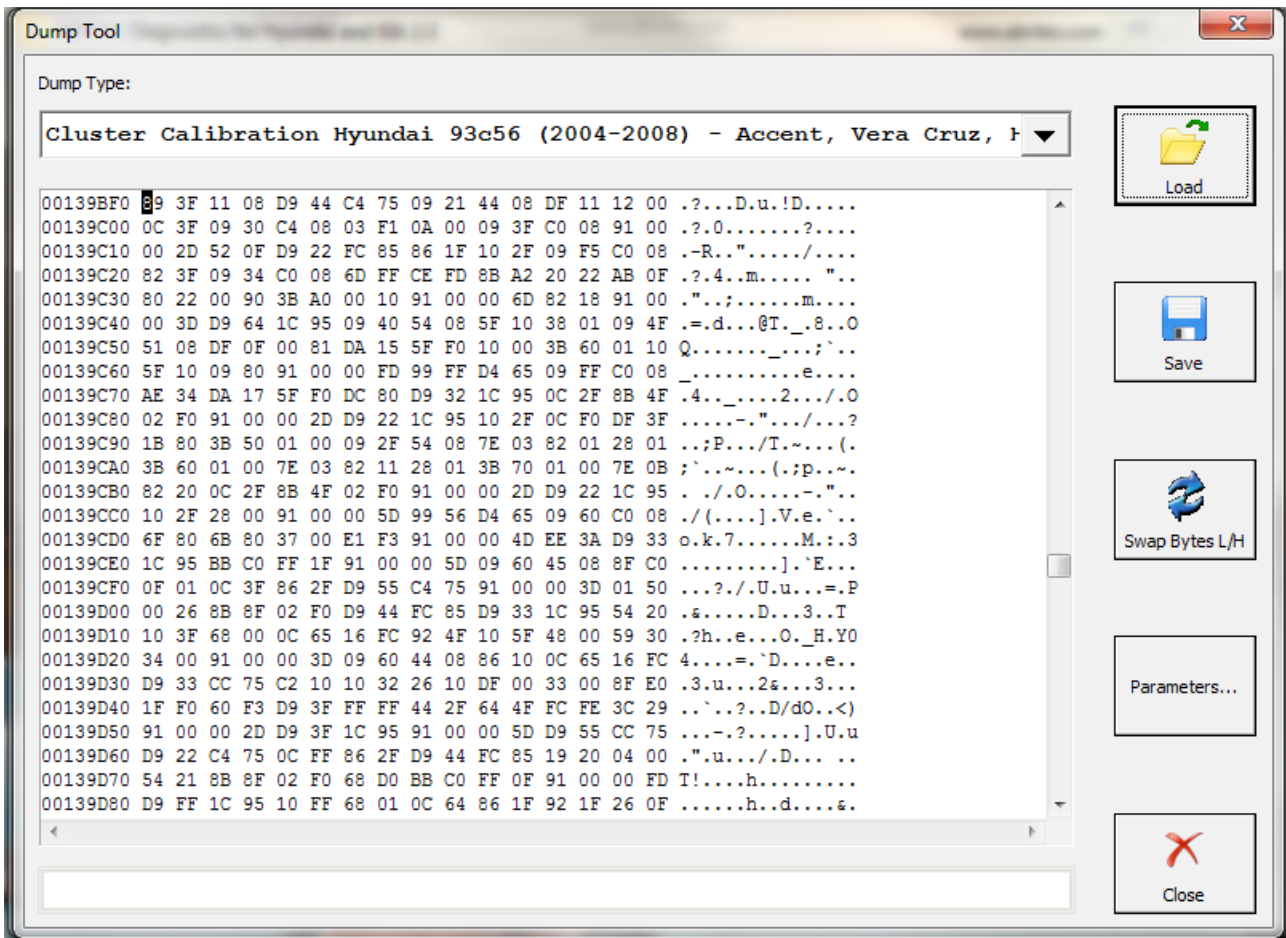


The Parameters button shows the modifications to the different parameters that can be applied.

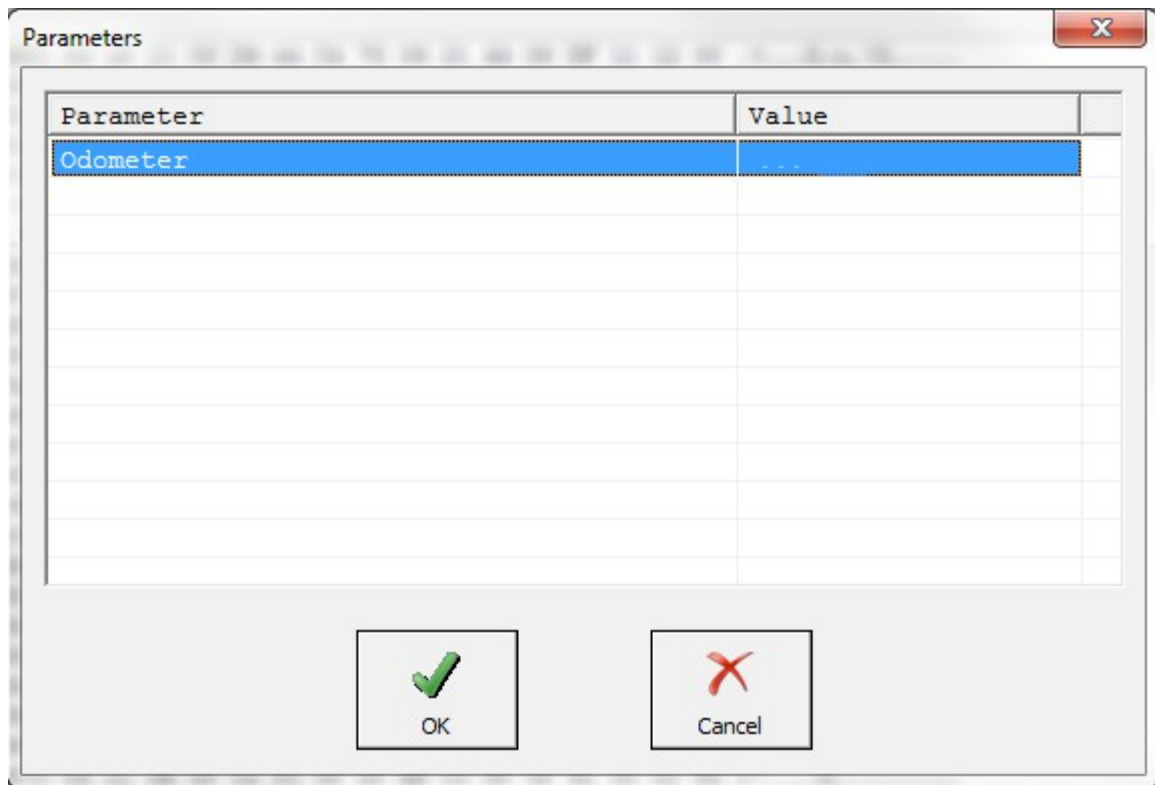


3.4 ECU Flasher

The ECU flasher lets the user read and update the Configuration Data and Flash of engine control units. It lets the . bin files read to be saved locally to the user's computer and stored for later usage.

There is also an additional Help button to provide further assistance to the user.

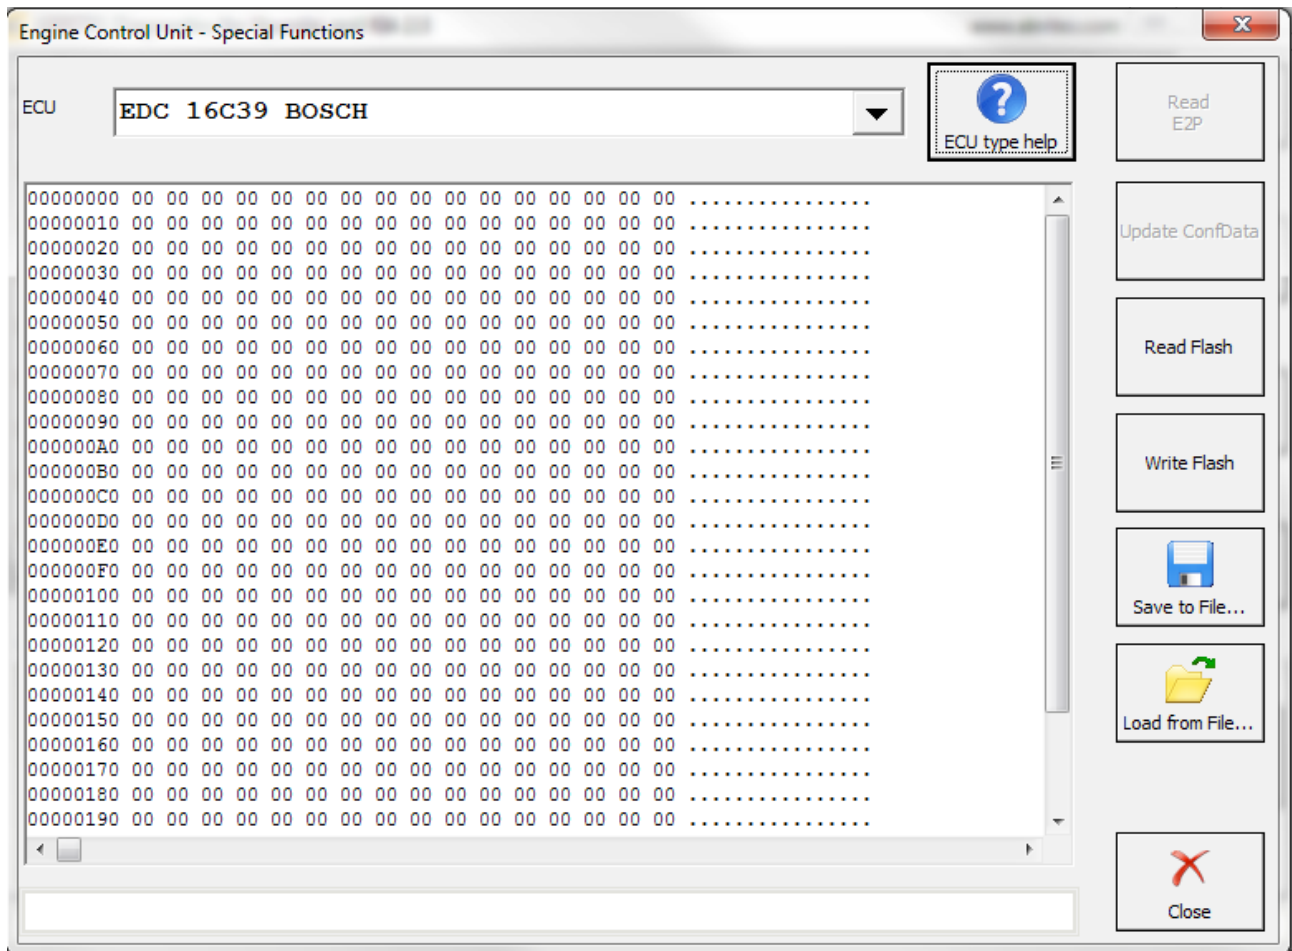


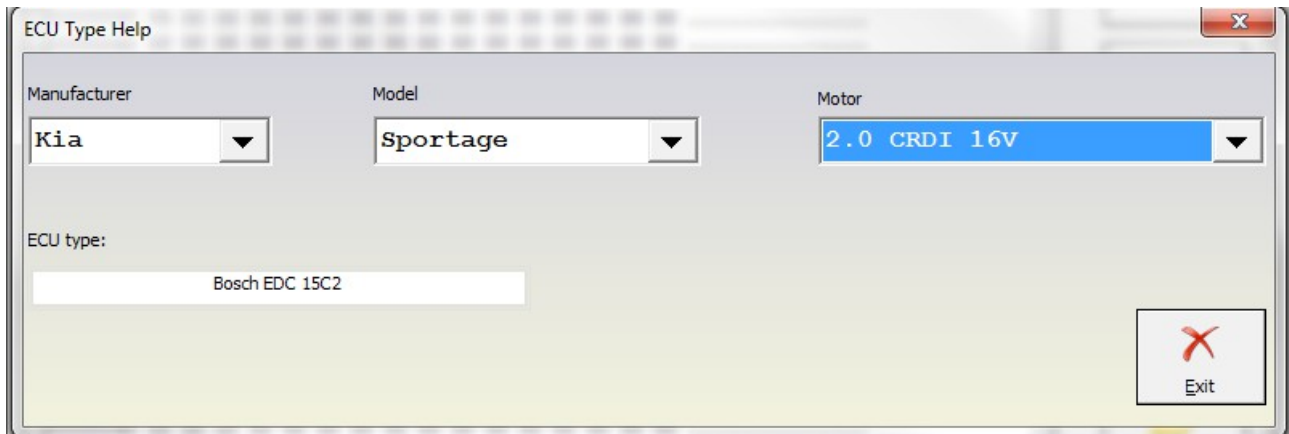

3.5 Cluster calibration

Cluster calibration is a function designed to help the proper functionality of a vehicle after replacing a module with a second hand unit. It assists the user to avoid mismatches in the values of different counters in order for the vehicles to function correctly.

When this function is selected the user will have the option to select the model and year of the vehicle.

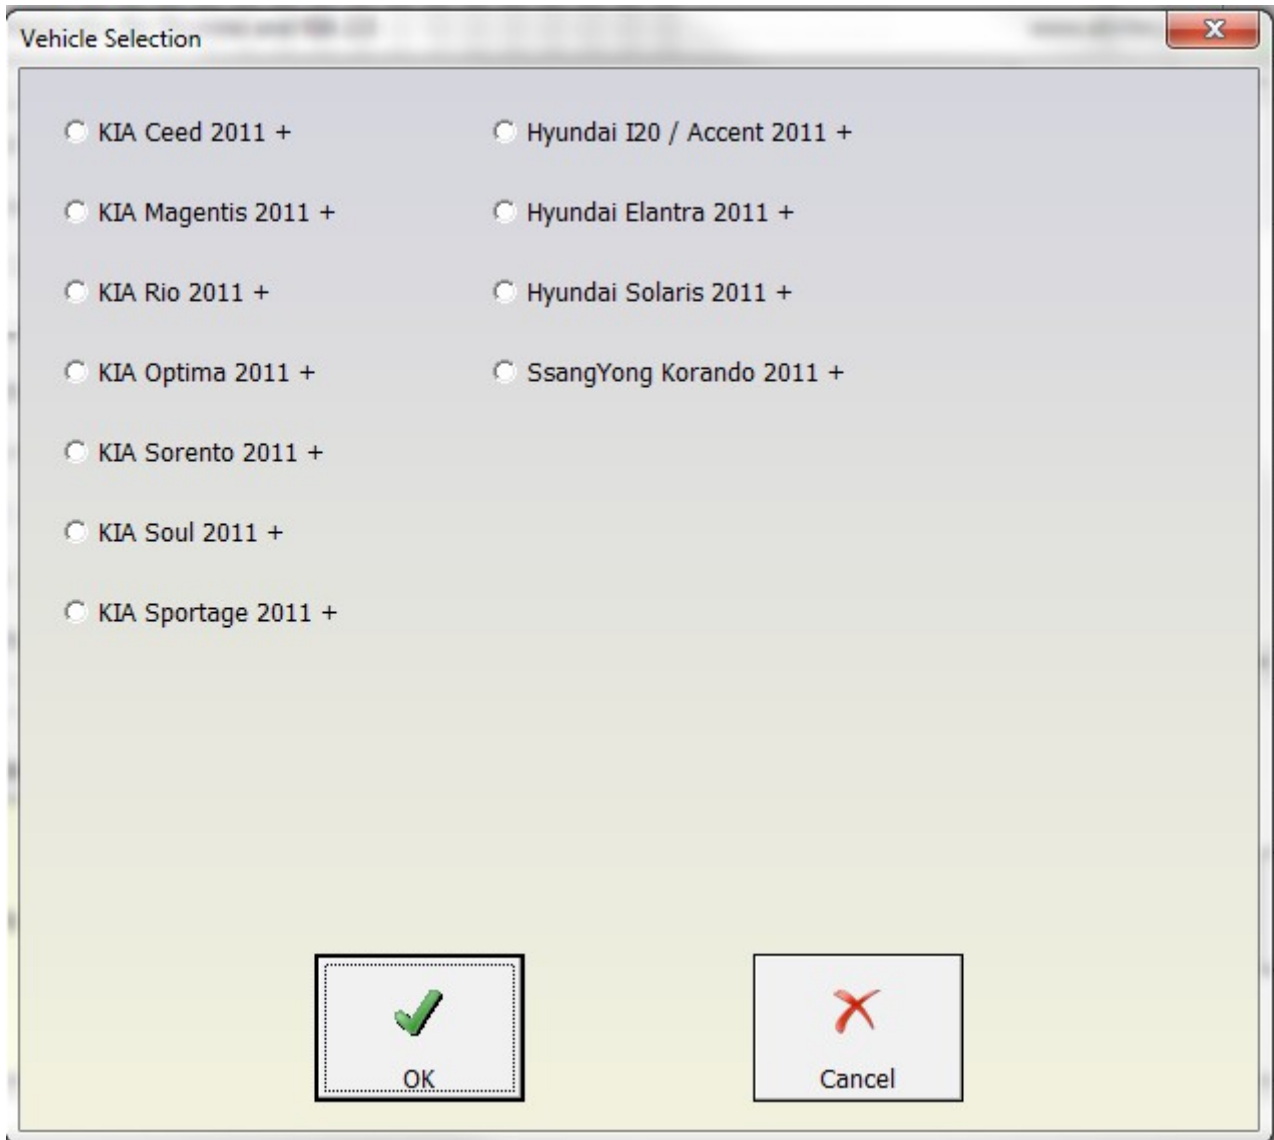

The following message is very important and selecting “I confirm” should be in coordination with local regulations.

ATTENTION!

This procedure will change the numerical value in the electronic component that shows the mileage of the car.

Before this procedure, please make sure that you have all the necessary permissions, approvals, and certificates. According to local legislation of your country, you should follow all the established procedures for this service activity, as well as comply with automobile specifications.

In case you have all the necessary authorization, after procedure completion, please do not forget to refer to all performed actions in all required documents: offers, orders for repair, invoices and any other technical, accounting or commercial documents.

Please confirm that you have read and understood this warning and that the subsequent procedure will be done at your request.

I confirm I refuse

From then on the user should get the current vehicle value, place the correct new value and click the "Set" button.

Cluster Calibration

Get Current 31508 Get Mileage

New Mileage 32494 Set Mileage


ABRITES Diagnostics for Hyundai and KIA

Mileage Recalibration successful

OK

3.6 Read/ Update Conf Data

This function allows the Configuration data from the vehicles to be updated via On Board Diagnostics (OBD). The files can be saved locally to the user's computer, updated, viewed and uploaded later.

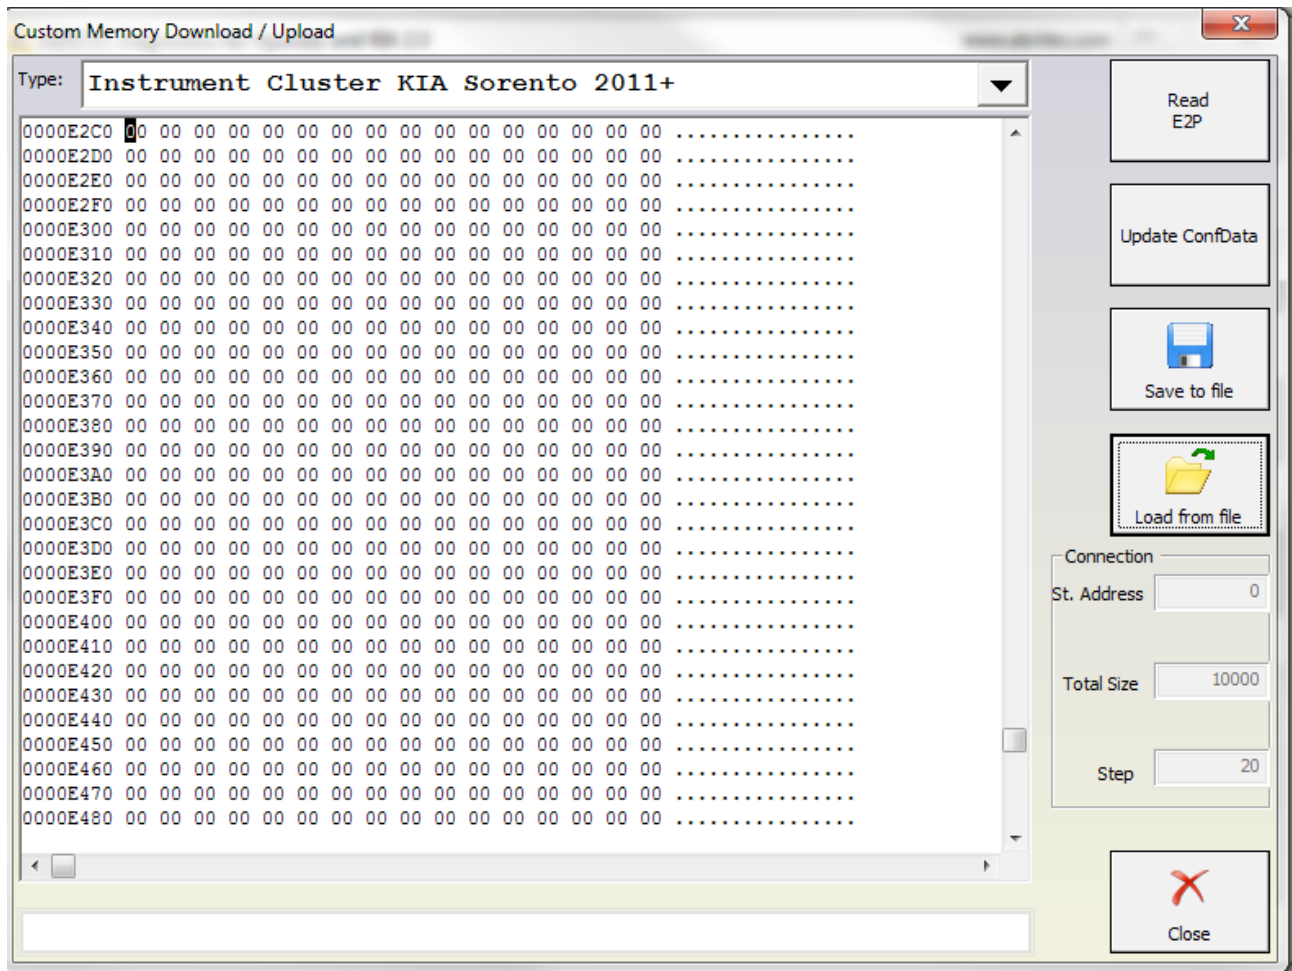

NOTE:

For a full list of supported models please visit abrites.com